

应用领域 | Application


- 专业网络录像机 | Professional NVR



产品特点 | Features

- 支持多路高清 (4K/5M/4M/1080p/720p) NVR
Support multiple channels HD NVR
- 支持高性能H265&H264视频编解码
Support high performance H.265/H.264 video codec.
- 支持HDMI/VGA 高清显示输出接口
Support HDMI/VGA video display.
- 支持PCIE/SATA/USB/Ethernet丰富接口
Support PCIE/SATA/USB/Ethernet peripherals.

主要模块 | Block Diagram

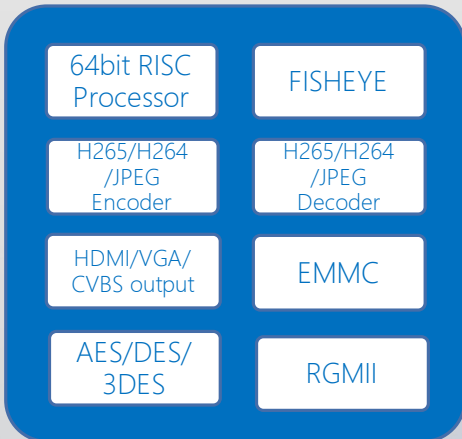

产品规格 | Specifications

CPU	Six Core CPU Support up to 1.5GHz
Video codec	Encoder: 4x1080p@30fps H265/H264, 1080p@120fps JPEG Decoder: 24x1080p@30fps H265/H264, 1080p@120fps JPEG
NPU	Smart Accelerator
Video Input	1 BT1120 input up to 4096x2160@30fps
Video Output	2xHDMI 2.1 output, support up to 4096x2160@60fps 1xVGA output, support up to 2560x1600@60fps 1xCVBS output 1 BT1120 output up to 4096x2160@30fps
Memory	64bit 2133Mbps/DDR3, 2400Mbps/DDR4, up to 8GB 1x8bit EMMC5.1 port, up to HS400 1xSPI NOR/NAND Flash
Network	2 External Gigabit Ports
Peripherals	3xSATA3, 1x2lane PCIE3, 2xUSB3, 2xUSB2 2xI2S(5 wire), 3xUART, 2xI2C, 1xIr, GPIO
Package	EHS-TFBGA813, 22.4mmx31.2mm Working temperature: -20°C~70°C
Others	Typical power consumption: 9W Power supply: Analog: 1.8v, IO: 3.3v/1.8v, Digital: CPU-1.0v, CORE-0.9v

上海 | Shanghai
上海市徐汇区宜山路717号6楼
717 Yishan Road, Block 2, Floor
6, Xuhui District, Shanghai.
Tel: +86 21 6112 1558,
Fax: +86 21 6406 6786

深圳 | Shenzhen
龙岗区天安云谷6栋东座1005-1007
Room 1005-1007, Cloud Park
Building 6 East,
Longgang District, ShenZhen
Tel: +86 0755 86255308

成都 | Chengdu
双流区双兴大道1号电子科大
大科技园B区6栋3层
UESTC Campus, B, 6#, 3rd
floor, Shuangliu,
Chengdu
Tel: +86 028 85783758

杭州 | Hangzhou
杭州市滨江区西兴街道物联
网街277号中胜大厦
Wulianwang road 277,
Zhongsheng Building,
Binjiang, Hangzhou.
Tel: +86 18001983519

sales@fullhan.com
marketing@fullhan.com
www.fullhan.com
stock: 300613.sz

